


PFX 615.3 – K POSICIONADOR

Aço / Aço Inoxidável, com Bola, com Sextavado Interno

Tipos

- Tipo **K**: Aço, carga de mola padrão
- Carcaça de aço, enegrecida
- Aço de esfera, temperado

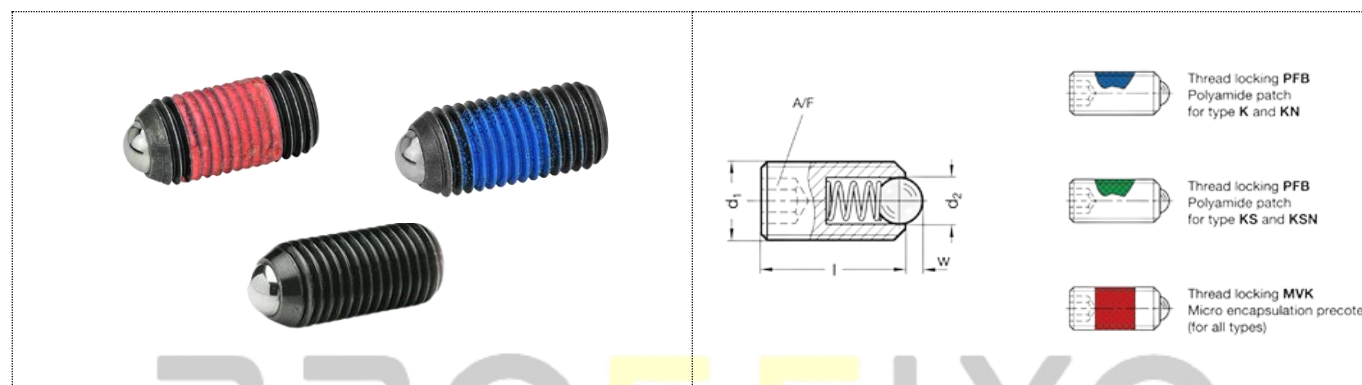

Descrição	d ₁	d ₂	eu ±0,1	A/F	c	Carga da mola em N ≈ inicial	Carga de mola Na extremidade N ≈	
PFX 615.3-M03-K	M3	1.5	8	1.5	0,4	3	4.5	1
PFX 615.3-M4-K	M4	2,5	12	2	0,8	8,5	14	1
PFX 615.3-M5-K	M5	3	14	2,5	0,9	8	14	1
PFX 615.3-M6-K	M6	3.5	15	3	1	11	18	2
PFX 615.3-M8-K	M8	4.5	18	4	1.5	18	31	4
PFX 615.3-M10-K	M10	6	23	5	2	24	45	7
PFX 615.3-M12-K	M12	8	26	6	2,5	26	49	13
PFX 615.3-M16-K	M16	10	33	8	3.5	41	86	32

PFX 615.3-M20-K	M20	12	43	10	4.5	56	111	65
PFX 615.3-M24-K	M24	15	48	12	5.5	81	151	103
PFX 615.3-M3-K-PFB	M3	1.5	8	1.5	0,4	3	4.5	1
PFX 615.3-M4-K-PFB	M4	2,5	12	2	0,8	8,5	14	1
PFX 615.3-M5-K-PFB	M5	3	14	2,5	0,9	8	14	1
PFX 615.3-M6-K-PFB	M6	3.5	15	3	1	11	18	1
PFX 615.3-M8-K-PFB	M8	4.5	18	4	1.5	18	31	4
PFX 615.3-M10-K-PFB	M10	6	23	5	2	24	45	8
PFX 615.3-M12-K-PFB	M12	8	26	6	2,5	26	49	13
PFX 615.3-M16-K-PFB	M16	10	33	8	3.5	41	86	32
PFX 615.3-M20-K-PFB	M20**	12	43	10	4.5	56	111	65
PFX 615.3-M24-K-PFB	M24**	15	48	12	5.5	81	151	103
PFX 615.3-M3-K-MVK	M3**	1.5	8	1.5	0,4	3	4.5	1
PFX 615.3-M4-K-MVK	M4**	2,5	12	2	0,8	8,5	14	1
PFX 615.3-M5-K-MVK	M5**	3	14	2,5	0,9	8	14	1
PFX 615.3-M6-K-MVK	M6**	3.5	15	3	1	11	18	2
PFX 615.3-M8-K-MVK	M8**	4.5	18	4	1.5	18	31	4
PFX 615.3-M10-K-MVK	M10**	6	23	5	2	24	45	8
PFX 615.3-M12-K-MVK	M12**	8	26	6	2,5	26	49	13
PFX 615.3-M16-K-MVK	M16**	10	33	8	3.5	41	86	32
PFX 615.3-M20-K-MVK	M20**	12	43	10	4.5	56	111	65
PFX 615.3-M24-K-MVK	M24**	15	48	12	5.5	81	151	103