


DIN 1530 - TIPO B PINO EXTRATOR

- **Material:** Aço prata tungstenado (ws)
- **Acabamento:** Retificado
- **Tolerância:** ISO (g6)
- **Dureza:** 58 ±2 HRC Indicado para moldes de injeção plástica até 200°C

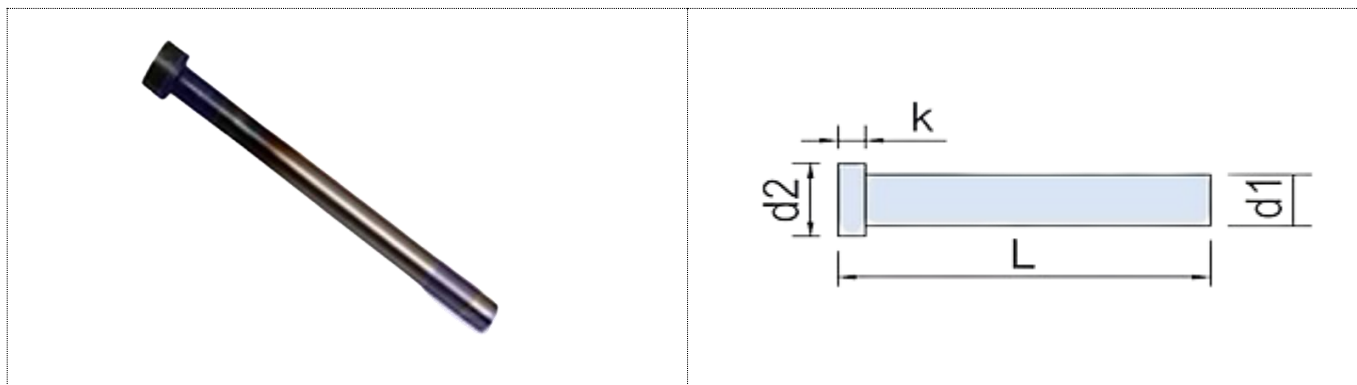

Dimensões em mm												
d1 Ø da Haste	d2 Ø da cabeça	K Altura da cabeça		L + 1,00 Comprimento total								
h6		(+) 0,2	Raio	100	125	150	200	250	300	350	400	500
1,0	3,0	2,00	0,2	X	X	X						
1,5	3,0	2,00	0,2	X	X	X	X					
2,0	4,0	2,00	0,2	X	X	X	X					
2,5	5,0	2,00	0,3	X	X	X	X					
3,0	6,0	3,0	0,3	X	X	X	X	X	X			
3,5	7,0	3,0	0,3	X	X	X	X	X	X			
4,0	8,0	3,0	0,3	X	X	X	X	X	X			
4,5	10,0	3,0	0,3	X	X	X	X	X	X	X	X	X

5,0	10,0	3,0	0,3	X	X	X	X	X	X	X	X	X
5,5	12,0	5,0	0,5	X	X	X	X	X	X	X	X	X
6,0	12,0	5,0	0,5	X	X	X	X	X	X	X	X	X
6,5	14,0	5,0	0,5	X	X	X	X	X	X	X	X	X
7,0	14,0	5,0	0,5	X	X	X	X	X	X	X	X	X
8,0	14,0	5,0	0,5	X	X	X	X	X	X	X	X	X
9,0	16,0	5,0	0,5	X	X	X	X	X	X	X	X	X
10,0	16,0	5,0	0,5	X	X	X	X	X	X	X	X	X
11,0	18,0	5,0	0,8	X	X	X	X	X	X	X	X	X
12,0	18,0	5,0	0,8	X	X	X	X	X	X	X	X	X
13,0	22,0	7,0	0,7	X	X	X	X	X	X	X	X	X
14,0	22,0	7,0	0,7	X	X	X	X	X	X	X	X	X
15,0	22,0	7,0	0,8	X	X	X	X	X	X	X	X	X
16,0	22,0	7,0	0,8	X	X	X	X	X	X	X	X	X



PROFFIXO

DO BRASIL INDÚSTRIA E COMÉRCIO LTDA

Soluções Personalizadas

Rua Paulo Silveira Costa, 60 – Vila Califórnia, São Paulo / SP – CEP 04775-200

Tel: +55 11 5525-1960 / 11 99235-1644 / 11 96375-6579

e-mail: proffixo@proffixo.com.br

Site: www.proffixo.com.br