


# DIN 1530 - TIPO A PINO EXTRATOR

- Material: H13 / Temperado
- Tratamento Nitretado
- Tolerância: ISO (g6)
- Dureza superficial: 70HRC
- Dureza núcleo: 40 -44HRC
- Temperatura máx trabalho: 500° -550°C

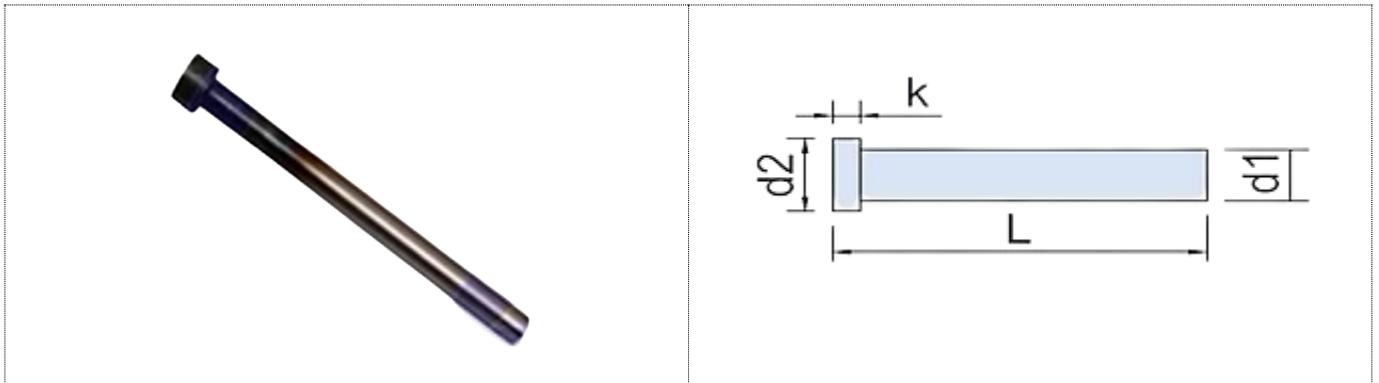

d1 Ø da Haste	d2 Ø da cabeça	K Altura da cabeça	
<b>g6</b>	(-) 0,05	(+) 0,2	Raio
<b>1,0</b>	3,0	2,0	0,2
<b>1,5</b>	3,0	2,0	0,2
<b>2,0</b>	4,0	2,0	0,2
<b>2,5</b>	5,0	2,0	0,3
<b>3,0</b>	6,0	3,0	0,3
<b>3,5</b>	7,0	3,0	0,3
<b>4,0</b>	8,0	3,0	0,3
<b>4,5</b>	10,0	3,0	0,3

<b>5,0</b>	10,0	3,0	0,3
<b>5,5</b>	12,0	5,0	0,5
<b>6,0</b>	12,0	5,0	0,5
<b>6,5</b>	14,0	5,0	0,5
<b>7,0</b>	14,0	5,0	0,5
<b>8,0</b>	14,0	5,0	0,5
<b>9,0</b>	16,0	5,0	0,5
<b>10,0</b>	16,0	5,0	0,5
<b>11,0</b>	18,0	5,0	0,8
<b>12,0</b>	18,0	5,0	0,8
<b>13,0</b>	22,0	7,0	0,7
<b>14,0</b>	22,0	7,0	0,7
<b>15,0</b>	22,0	7,0	0,8
<b>16,0</b>	22,0	7,0	0,8



**PROFFIXO**

DO BRASIL INDÚSTRIA E COMÉRCIO LTDA

*Soluções Personalizadas*

Rua Paulo Silveira Costa, 60 – Vila Califórnia, São Paulo / SP – CEP 04775-200

Tel: +55 11 5525-1960 / 11 99235-1644 / 11 96375-6579

e-mail: [proffixo@proffixo.com.br](mailto:proffixo@proffixo.com.br)

Site: [www.proffixo.com.br](http://www.proffixo.com.br)