


DIN 1530 – TIPO C PINO EXTRATOR

- **Material:** Aço prata (ws) / Aço H13
- **Execução:** Temperado, revenido, retificado e cabeça forjada a quente
- **Tolerância:** haste g6
- **Dureza:** 58 +/-2 HRC

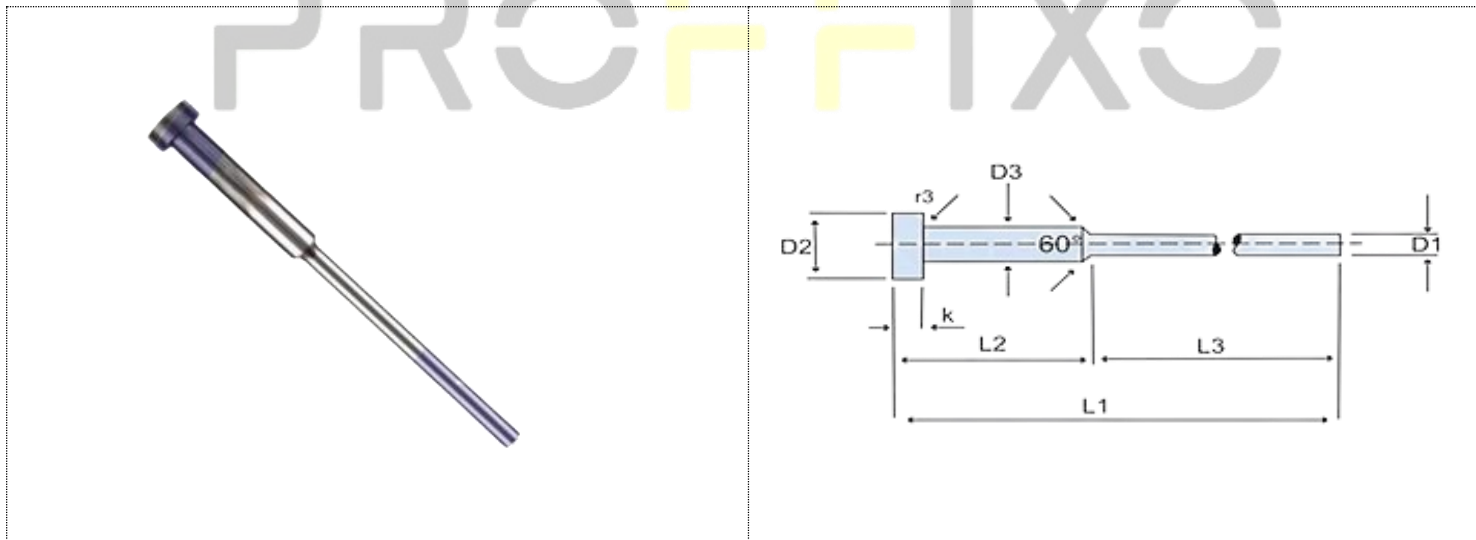

Descrição	D3(mm) Diam. Do Pino	L2(mm) Comprim. Do Corpo	D1(mm) Diam. Rebaixo	L3(mm) Comprim. do Rebaixo	L1(mm) Comprim. Total	D2(mm) Diam. Da Cabeça	K(mm) Altura da Cabeça
2x75 / 1,0x50	2,0	25	1,0	50	75	4,0	2,0
2x75 / 1,5x50	2,0	25	1,5	50	75	4,0	2,0
2x100 / 1,0x75	2,0	25	1,0	75	100	4,0	2,0
2x100 / 1,5x75	2,0	25	1,5	75	100	4,0	2,0
2x100 / 1,0x50	2,0	100	1,0	50	100	4,0	2,0
2x100 / 1,5x50	2,0	100	1,5	50	100	4,0	2,0
2x125 / 1,0x75	2,0	50	1,0	75	125	4,0	2,0
2x125 / 1,5x75	2,0	50	1,5	75	125	4,0	2,0
2x150 / 1,0x75	2,0	75	1,0	75	150	4,0	2,0
2x150 / 1,5x75	2,0	75	1,5	75	150	4,0	2,0
2x150 / 1,0x100	2,0	50	1,0	100	150	4,0	2,0

2x150 / 1,5x100	2,0	50	1,5	100	150	4,0	2,0
2x200 / 1,0x100	2,0	100	1,0	100	200	4,0	2,0
2x200 / 1,5x100	2,0	100	1,5	100	200	4,0	2,0
3x75 / 1,0x50	3,0	25	1,0	50	75	6,0	3,0
3x75 / 1,5x50	3,0	25	1,5	50	75	6,0	3,0
3x75 / 2,0x50	3,0	25	2,0	50	75	6,0	3,0
3x100 / 1,0x50	3,0	50	1,0	50	100	6,0	3,0
3x100 / 1,5x50	3,0	50	1,5	50	100	6,0	3,0
3x100 / 2x50	3,0	50	2,0	50	100	6,0	3,0
3x100 / 2,5x50	3,0	50	2,5	50	100	6,0	3,0
3x125 / 1,0x75	3,0	50	1,0	75	125	6,0	3,0
3x125 / 1,5x75	3,0	50	1,5	75	125	6,0	3,0
3x125 / 2,0x75	3,0	50	2,0	75	125	6,0	3,0
3x125 / 2,5x75	3,0	50	2,5	75	125	6,0	3,0

3x150 / 1,0x75	3,0	75	1,0	75	150	6,0	3,0
3x150 / 1,5x75	3,0	75	1,5	75	150	6,0	3,0
3x150 / 2,0x75	3,0	75	2,0	75	150	6,0	3,0
3x150 / 2,5x75	3,0	75	2,5	75	150	6,0	3,0
3x150 / 1,0x100	3,0	50	1,0	100	150	6,0	3,0
3x150 / 1,5x100	3,0	50	1,5	100	150	6,0	3,0
3x150 / 2,0x100	3,0	50	2,0	100	150	6,0	3,0
3x150 / 2,5x100	3,0	50	2,5	100	100	6,0	3,0
3x175 / 1,0x100	3,0	75	1,0	100	175	6,0	3,0
3x175 / 1,5x100	3,0	75	1,5	100	175	6,0	3,0
3x175 / 2,0x100	3,0	75	2,0	100	175	6,0	3,0
3x175 / 2,5x100	3,0	75	2,5	100	175	6,0	3,0
3x200 / 1,0x100	3,0	100	1,0	100	200	6,0	3,0
3x200 / 1,5x100	3,0	100	1,5	100	200	6,0	3,0

3x200 / 2,0x100	3,0	100	2,0	100	200	6,0	3,0
3x200 / 2,5x100	3,0	100	2,5	100	200	6,0	3,0
3x200 / 1,0x125	3,0	25	1,0	125	200	6,0	3,0
3x200 / 1,5x125	3,0	25	1,5	125	200	6,0	3,0
3x200 / 2,0x125	3,0	25	2,0	125	200	6,0	3,0
3x200 / 2,5x125	3,0	25	2,5	125	200	6,0	3,0
3x200 / 1,0x150	3,0	50	1,0	150	200	6,0	3,0
3x200 / 1,5x150	3,0	50,0	1,5	150	200	6,0	3,0
3x200 / 2,0x150	3,0	50,0	2,0	150	200	6,0	3,0
3x200 / 2,5 x150	3,0	50,0	2,5	150	200	6,0	3,0
3x150 / 2,5x100	3,0	50	2,5	100	100	6,0	3,0
3x200 / 2,5 x150	3,0	50,0	2,5	150	200	6,0	3,0
3x250 / 1,0x125	3,0	125,0	1,0	125	250	6,0	3,0
3x250 / 1,5x125	3,0	125,0	1,5	125	250	6,0	3,0

3x250 / 2,0x125	3,0	125,0	2,0	125	250	6,0	3,0
3x250 / 2,5x125	3,0	125,0	2,5	125	250	6,0	3,0
3x250 / 1,0x150	3,0	100,0	1,0	150	250	6,0	3,0
3x250 / 1,5x150	3,0	100,0	1,5	150	250	6,0	3,0
3x250 / 2,0x150	3,0	100,0	2,0	150	250	6,0	3,0
3x250 / 2,5x150	3,0	100,0	2,5	150	250	6,0	3,0
3x300 / 1,5x100	3,0	200,0	1,5	100	300	6,0	3,0
3x300 / 1,5x150	3,0	150,0	1,5	150	300	6,0	3,0
3x300 / 1,5x200	3,0	100,0	1,5	200	300	6,0	3,0
3x300 / 2,0x100	3,0	200,0	2,0	100	300	6,0	3,0
3x300 / 2,0x150	3,0	150,0	2,0	150	300	6,0	3,0
3x300 / 2,0x200	3,0	100,0	2,0	200	300	6,0	3,0
4x150 / 2,0x100	4,0	50,0	2,0	100	150	8,0	3,0
4x200 / 2,0x 100	4,0	100,0	2,0	100	200	8,0	3,0

4x250 / 2,0x125	4,0	125,0	2,0	125	250	8,0	3,0
4x150 / 2,5x100	4,0	50,0	2,5	100	150	8,0	3,0
4x200 / 2,5x100	4,0	100,0	2,5	100	200	8,0	3,0
4x250 / 2,5x125	4,0	125,0	2,5	125	250	8,0	3,0
5x150 / 3,0x100	5,0	50,0	3,0	100	150	10,0	3,0
5x200 / 3,0x100	5,0	100,0	3,0	100	200	10,0	3,0
5x250 / 3,0x125	5,0	125,0	3,0	125	250	10,0	3,0
6x150 / 4,0x100	6,0	50,0	4,0	100	150	12,0	5,0
6x200 / 4,0x100	6,0	100,0	4,0	100	200	12,0	5,0
6x250 / 4,0x125	6,0	125,0	4,0	125	250	12,0	5,0
8x150 / 5,0x100	8,0	50,0	5,0	100	150	14,0	5,0
8x200 / 5,0x100	8,0	100,0	5,0	100	200	14,0	5,0
8x250 / 5,0x125	8,0	125,0	5,0	125	250	14,0	5,0